



Tri-logic Bass Preamp II

First made popular by Xotic Effects, the Tri-Logic is back!

Renewed and Reincarnated by EWS, the "Tri-Logic Bass Preamp 2" is significantly smaller in size and more affordable. With all the same features of the former Tri-Logic, 18-volts & 3-band EQ, the Tri-Logic Bass Preamp 2 has evolved with improved sound quality and usability.

Volume

Adjusts the volume.

Gain

to control +20db boost.

Mid Selector Switch

Allows you to enhance the High-Mid or Low-Mid frequencies.

3 Band EQ

Allows you to cut or boost Treble, Bass and Middle frequencies.

Pedal is compatible with both passive and active bass input. With the slide switch on right side, you can switch between the 2 input type.

Spec

Size(W/D/H) 112mm/65mm/50mm

Weight 320g

True Bypass Switching

Power Consumption 18VDC/4.3mA

Battery Type 9VDC(006P) x2

AC Adapter 9~18VDC, Negative Tips
(Optional) (Regulated recommended such as Dunlop ECB04 Power Supply)

INPUT Passive-1MΩ


Active-100KΩ

Treble 10KHz+/-13dB

Middle Hi-Mid 800Hz+/-10dB

Low-Mid 400Hz+/-12dB

Bass 90Hz+/-15dB

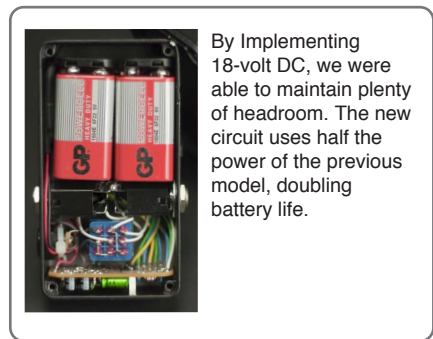

By Implementing 18-volt DC, we were able to maintain plenty of headroom. The new circuit uses half the power of the previous model, doubling battery life.

www.ews-us.com

distributed by Prosound Communications Inc.

www.prosoundcommunications.com